

► EHD-IG | PERFORMANCE

EHD-IG | Heating Information Table

Model	Input mbtu / hr per Heater	Number of Heaters	Total Output mbtu / Hour	Temp. Rise (°F)	Weight (lbs)
EHD-1-48IG	200	1	160	24	670
EHD-1-60IG	250	1	200	25	700
EHD-1-72IG	250	1	200	20	730
EHD-2-96IG	400	1	320	23	1205
EHD-2-108IG	400	1	320	22	1295
EHD-2-120IG	250	2	400	24	1378
EHD-2-132IG	250	2	400	23	1598
EHD-2-144IG	250	2	400	19	1650
EHD-3-156IG	350	2	560	26	1950
EHD-3-168IG	400	2	640	26	2005
EHD-3-180IG	400	2	640	26	2065
EHD-3-192IG	400	2	640	25	2120
EHD-3-204IG	400	2	640	25	2225
EHD-3-216IG	400	2	640	24	2278
EHD-4-228IG	350	3	840	27	2796
EHD-4-240IG	350	3	840	27	2865



INFO


For additional EHD-IG performance information, reference performance table on page 178.

EHD-IG | Sound Levels

High Speed	71 dBA	Measured 10 ft. from unit in a free field based on a 1 motor unit
------------	--------	---

EHD-IG | Three Phase Motor Options

Voltages available	208	240	480	575
Amp draw per motor	17	15.8	7.9	6.3

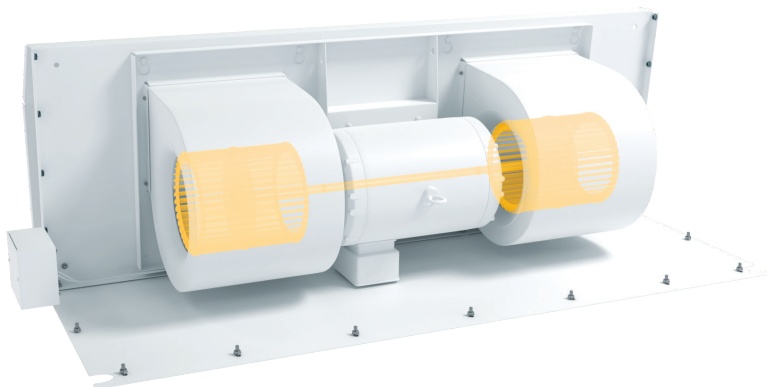

Performance Highlight

The air curtain is direct drive, which avoids misalignment of couplers and outboard bearings and eliminates periodic belt replacement.