

► ETA-HW/ST | MECHANICAL DETAILS & DRAWINGS

ETA-HW/ST | Mechanical Information Table


MODEL	Overall Width (in.)	Nozzle Width (in.)	Mounting Width (in.)
ETA-1-36HW/ST	39	36	37.5
ETA-1-48HW/ST	51	48	49.5
ETA-1-60HW/ST	63	60	61.5
ETA-2-72HW/ST	75.07	72.07	73.57
ETA-2-84HW/ST	87.07	84.07	85.57
ETA-2-96HW/ST	99.07	96.07	97.57
ETA-3-108HW/ST	111.15	108.15	109.65
ETA-3-120HW/ST	123.15	120.15	121.65
ETA-3-132HW/ST	135.15	132.15	133.65
ETA-4-144HW/ST	147.22	144.22	145.72
ETA-4-156HW/ST	159.22	156.22	157.22
ETA-4-168HW/ST	171.22	168.22	169.22




NOTES

1. Installer responsible for structurally sound mounting of the unit.
2. Verify that overall dimensions will fit in the opening.
3. Coil connections shown on right hand side. Can be either right or left. Please specify.
4. Size steam trap (provided by others) by 3 times the manufacturer's recommended size for satisfactory operation.


SIDE

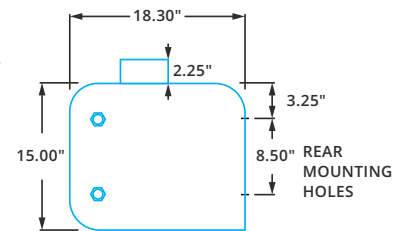

TOP

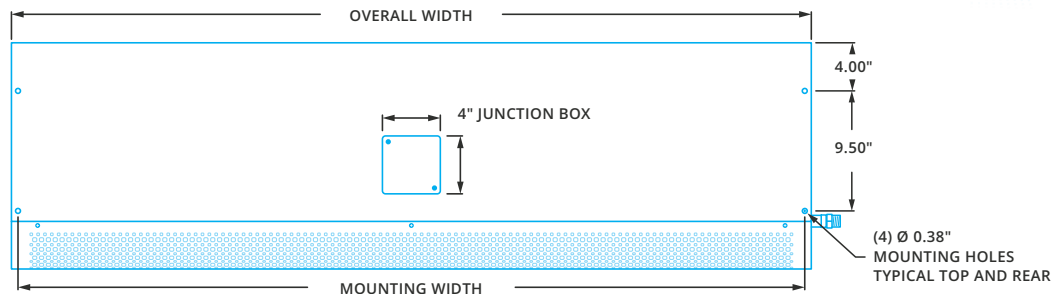

FRONT

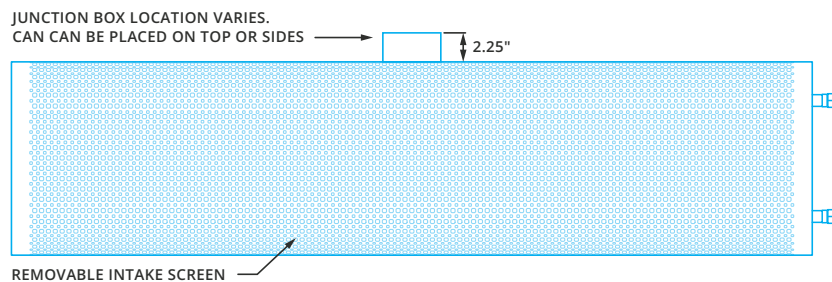

BOTTOM

