



MP-HW



MP-ST

v4.2.0

MP-HW/ST



The MP HW/ST offers the same features and functions as all MP units (compact size, easy-to-install, low profile) but is available with Hot Water and Steam fittings to connect with buildings using hot water or steam as the primary source of heat. The MP HW/ST meets all the necessary criteria to be used as an exception to vestibules (ANSI/AMCA 220 Standard) in new construction and retrofit applications for offices, restaurants, hospitals, grocery stores and other applications where a vestibule can be eliminated.

OPTIONS


HEATING

Unheatedpg 117

Electric.pg 119

FILTER

½" Cleanable (Unheated only)

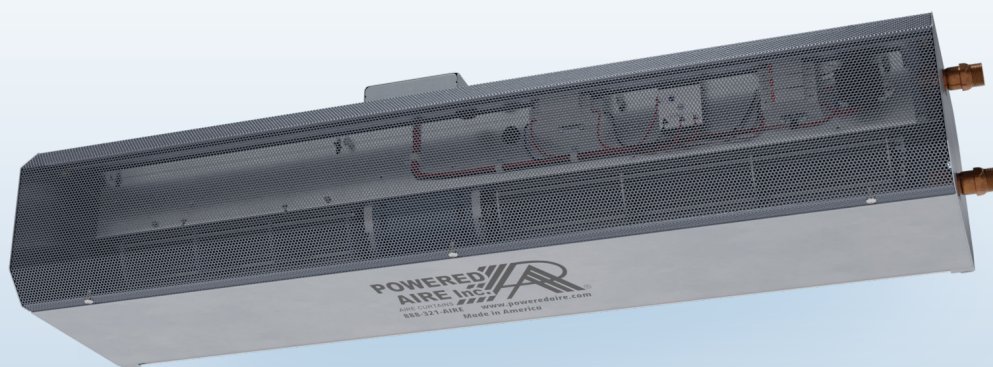

AT A GLANCE

Single Incremental Widths

30" to 10'

Max Installation Height

10'

Heavy Duty Motors

1/5 HP

KEY DESIGN FEATURES

- Low-profile outer cabinet constructed of 18-gauge 304 stainless steel with #3 finish
- 1/5 HP ODP (Open Drip Proof) direct-drive variable-speed motor(s)
- Adjustable air foil vane (+/-20°)
- NEMA 12 control panel
- Coil made to AHRI Standard 410
- Hot water coil comprised of galvanized steel casing, 5/8" copper tube, aluminum fins, and same end supply/return connections
- Leak tested at 450 psi
- Custom coil selections available (consult factory)

RECOMMENDED CONTROLS & ACCESSORIES

- Activation by 24V magnetic door switch
- SmartTouch controller
- Hot water or steam control valve with actuator

